

# Layout 2 / 3

With time and temperature controls. Group 3 and 4 boilers operate on demand only.


**Gas or oil fired boiler only.**  
 Hot water only      A on    B off    C off  
 Heating and hot water    A on    B on    C off

**Solid fuel boiler only.**  
 Heating and hot water    A off    B on    C on  
 Hot water only or slumber    A off    B off    C off

**Solid fuel boiler with gas or oil fired boiler.**  
 Heating and hot water.    A on    B on    C on

**Anti-boil control**  
 In the event of an overheated situation developing, anti-boil stat (2) set at 85°C will make and switch on the space heating pump. If the space heating pump or the electricity should fail, anti-boil stat (1) set at 88°C will break and allow the spring open motorised valve to open, this will switch off the gas or oil fired boiler and open the cylinder circuit.

Refer to installation instructions for boiler classification.

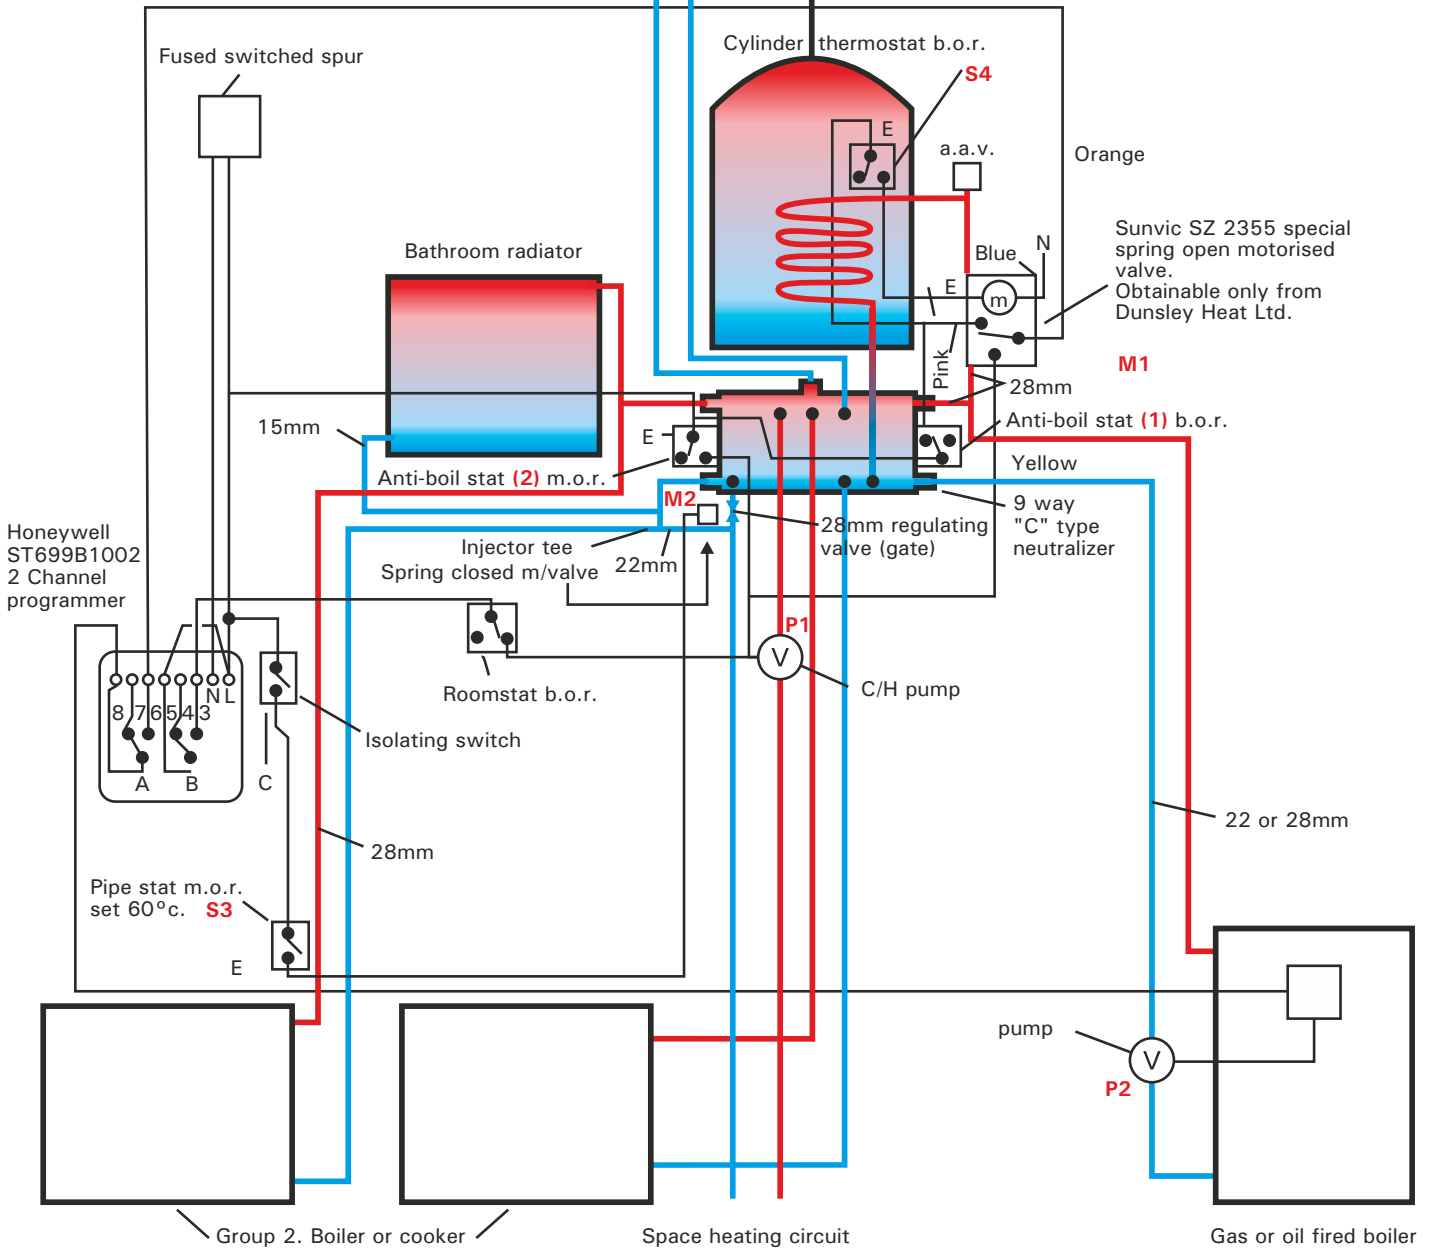

## THE BEST OF BOTH WORLDS LINK UP WITH DUNSLEY NEUTRALIZER SYSTEM



All Dunsley Products are manufactured in Great Britain

Please note these Dunsley Link-up designs are copyrighted for use with the Dunsley Neutralizer system and are not for use with other types of link-up systems as they may not work and we cannot be held responsible for and problems or system failure that may occur.

Dunsley Heat Ltd, Bridge Mills, Huddersfield Road,  
 Holmfirth, Huddersfield HD9 3TW Tel: (01484) 682635 Fax: (01484) 688428  
 email: sales@dunsleyheat.co.uk Web Site: www.dunsleyheat.co.uk